

Maxisafe Flat Bar Anchor 500mm

ZCL500

Maxisafe Advantages

- Maxisafe Flat Bar Anchor meets the requirements of AS/NZS55232 2013 and has a rating of 1 person - 15kn
- Fixed Anchor for Roof Work
- Suitable for trapezoidal custom orb roof top
- Material – Steel
- Not to be used in acidic or basic environments
- Not to be used for lifting
- Fixings required
- Read and comply with user instructions before use

Anchor Standards

In recent time there has been some confusion in the Standards for Anchors. The above information is derived from AS/NZS1891.4 2009 – Selection Use and Maintenance.

Reading this standard will provide much information leading to the correct application of Industrial Fall Arrest Systems. In providing information on applications for Anchorages this section provides the strength requirements as above. It does not provide methodology of testing – this information is contained in other Standards


- AS/NZS5532 2013 Manufacturing requirements for single point anchor device used for harness based work at height
- AS/NZS1891.2 2001 Horizontal lifeline and rail systems (this standard has provision for Proprietary Systems)
- AS/NZS1891.3 1997 Fall-arrest devices (refer Section 2.3 Anchorage Lines)

Maxisafe Anchorages

Whilst currently small the MAXISAFE range of ANCHORS can provide the safety required to many applications.

Product Specifications

Product Code	Description	Pack Qty	Carton Qty	Barcode
ZCL500	Maxisafe Flat Bar Anchor 500mm	1	1	XXXXXXXXXXXX

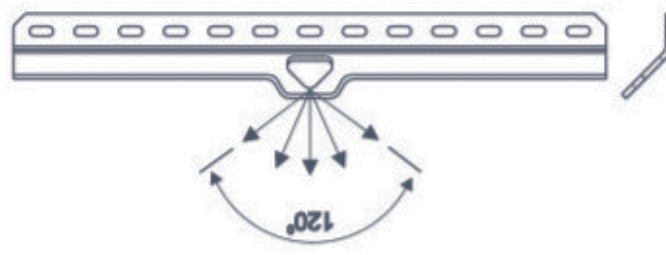

[CLICK HERE FOR PRODUCT SPEC](#)

there's safe and there's Maxisafe.

Your Maxisafe Dealer:

www.maxisafe.com.au
1300 062 947 | sales@techware.net.au

© Maxisafe is a registered trademark of Techware Pty Ltd